

Thermostat Instruction Sheet

TH-PSD Single-Stage Thermostat

TH-PSD Specifications

Digital non-programmable thermostat large back-lit display.

Range: 45° to 90°F (7° to 32°C) heat/cool

Max Ambient Temp: 122°F (50°C)

Differential: +/- 0.5°F Fixed

Operation: Single-Stage

Electrical Rating: System powered only. 1.5 amps at 24VAC


Thermostat requires constant 24V power; batteries not required.

Contact Action: Opens on rise

Dimensions: 5.05" x 3.25" x 1.10"

Additional Features: Meets relevant CE specifications.

Figure 1 • TH-PSD Thermostat

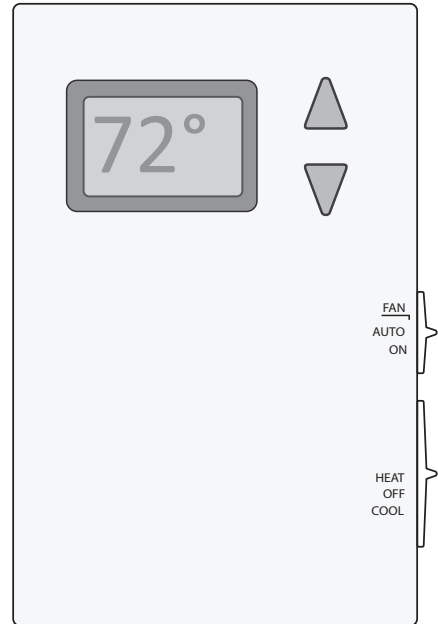

WARNING



To avoid electrical shock or damage to equipment, disconnect all power before installing or servicing.

Installation Instructions

1. Remove cover of thermostat from base.
2. Disconnect the power source.
3. Locate in an area with good air circulation (no outside walls).
4. Install the thermostat approximately 5 feet above floor level.
5. Replace the cover.

Figure 2 • TH-PSD Thermostat Wiring

Reference the heater installation and operation manual for specific installation requirements.

