


DETROIT RADIANT PRODUCTS CO.

Viconics HL-201 Thermostat

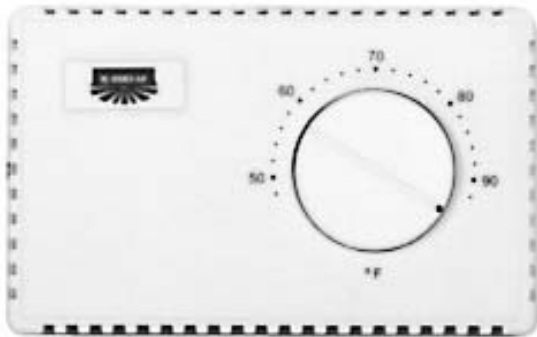

Range
50°F to 90°F

Differential
2°F Fixed

Contact Action
Opens on rise

Electrical Rating
24 VAC-15%, +10%
50/60HRZ; 2VA


Dimensions
Height: 2.75"
Width: 4.5"
Depth: 1.25"

Operation
Two-stage
Low voltage


Additional Features

- Forced high fire delay.
- Isolated triac output-30VAC at 1/2A maximum.

TYPICAL WIRING DIAGRAMS

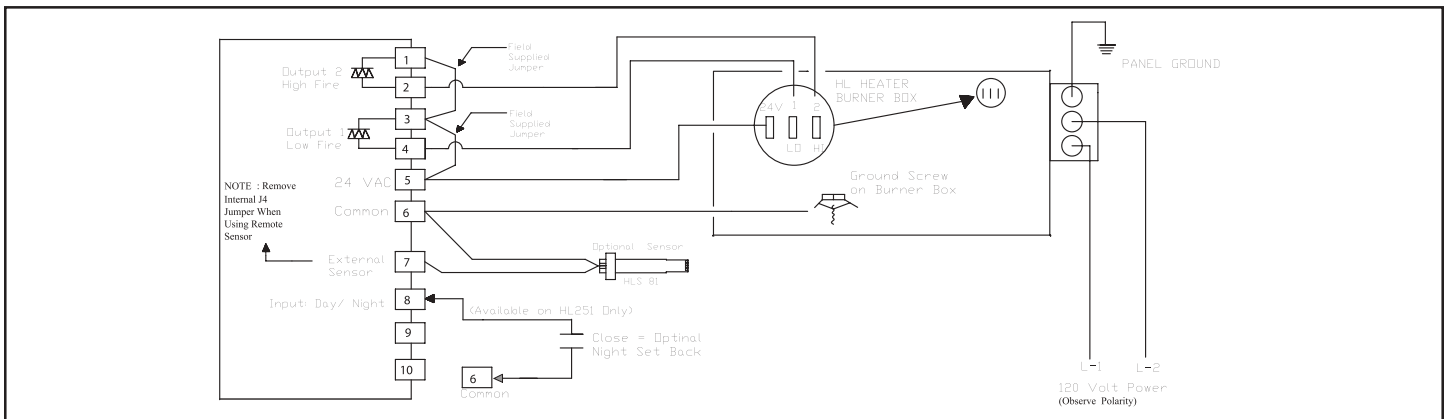

Two-stage heaters with a HL-201 or 251 thermostat. Single heater, single thermostat. No HLRB (relay board) is installed.

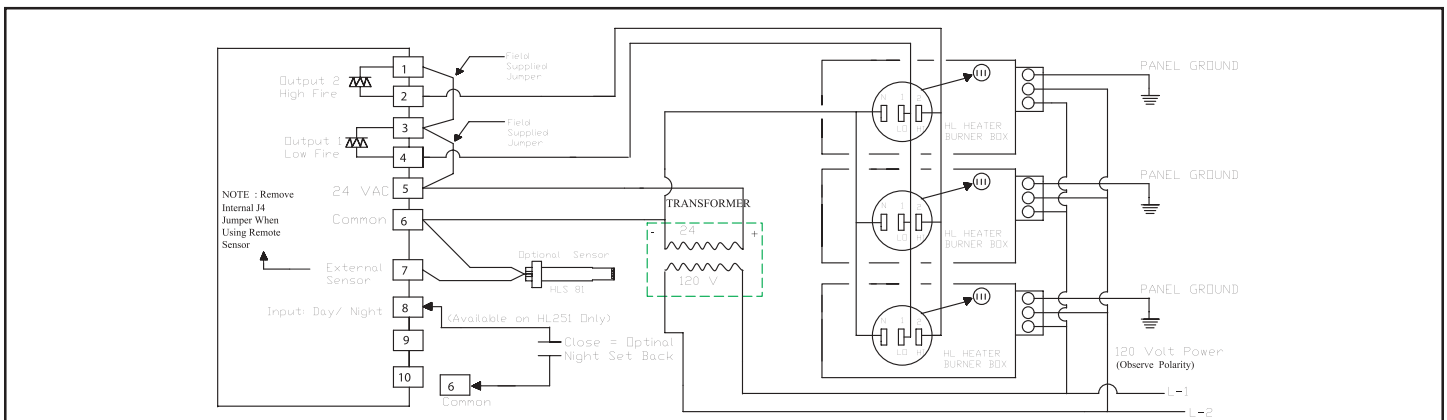

Two-stage heaters with a HL-201 or HL-251 thermostat. Single heater, single thermostat. HLRB (relay boards) are installed.



Printed in U.S.A.
© 2006 Detroit Radiant Products Co.
21400 Hoover Rd., Warren, MI 48089
T. (586) 756-0950 F. (586) 756-2626
www.detroitradiant.com
Form# LSH046-1/06 (DRP)