

# DETROIT RADIANT PRODUCTS CO.

## Lux Pro PSP-722 Thermostat



**Range**  
40°F to 95°F

**Differential**  
Adjustable

**Contact Action**  
Opens on rise


**Electrical Rating**  
30V max (24 VAC nominal)  
Millivolt Control  
1.5 AMP max per terminal  
2.0 AMP terminal sum

**Dimensions**  
Height: 4.313"  
Width: 5.875"  
Depth: 1.188"


**Operation**  
Two-stage  
Low voltage  
Millivolt

**Additional Features**  
7-day individual programming.

### TYPICAL WIRING DIAGRAMS

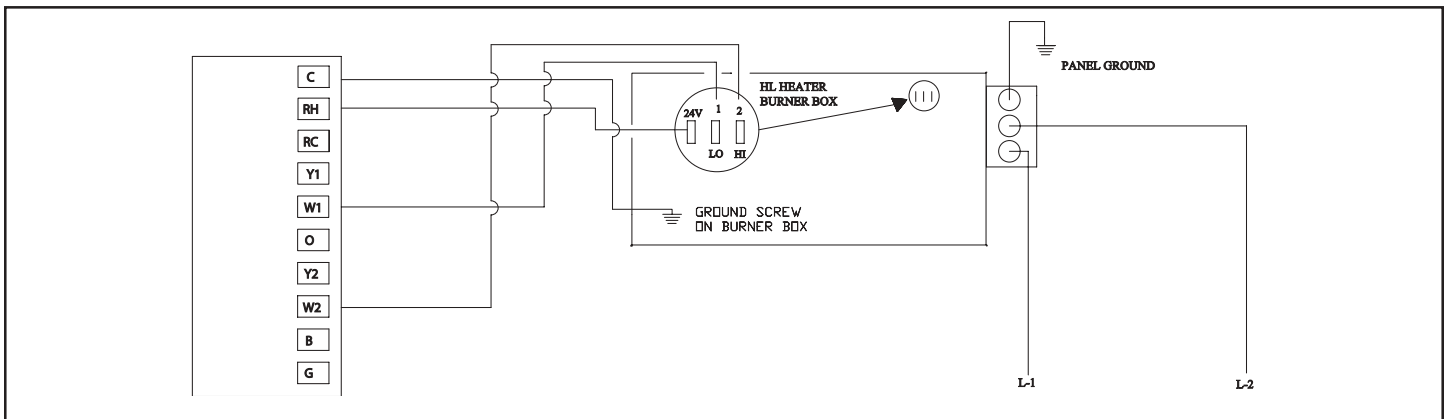

Two-stage heaters with a PSP-722 thermostat. Single heater, single thermostat. No HLRB (relay board) is installed.

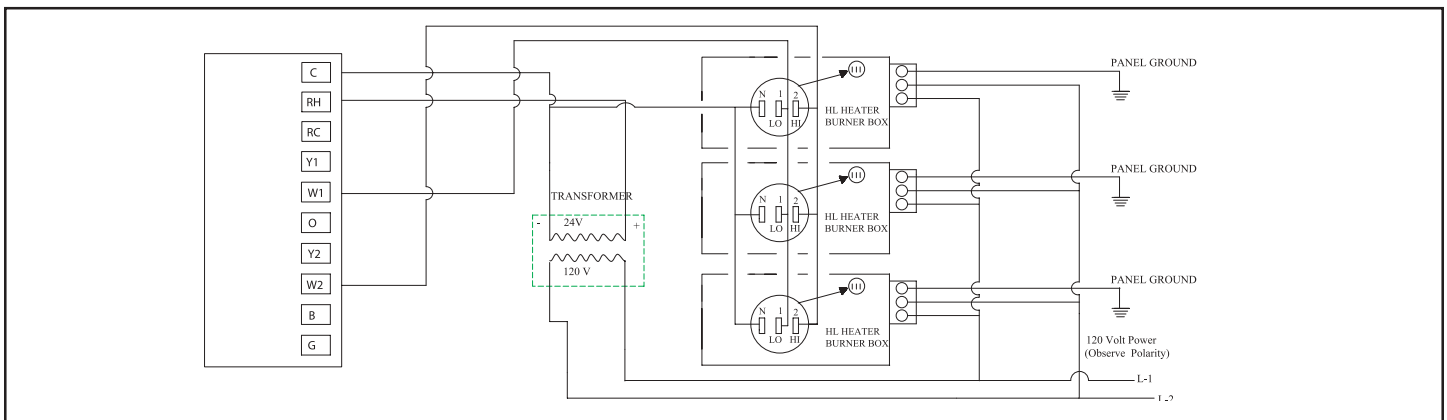

Two-stage heaters with a PSP-722 thermostat. Single heater, single thermostat. HLRB (relay boards) are installed.



Printed in U.S.A.  
© 2006 Detroit Radiant Products Co.  
21400 Hoover Rd., Warren, MI 48089  
T. (586) 756-0950 F. (586) 756-2626  
www.detroitradiant.com  
Form# LSH050-4/06 (DRP)