

DETROIT RADIANT PRODUCTS CO.

Lux Pro TH-D152 Thermostat



Range
45°F to 90°F

Differential
2°F Fixed

Contact Action
Opens on rise


Electrical Rating
Millivolt or 24V
1.5 AMPS max

Dimensions
Height: 4.5"
Width: 2.75"
Depth: 1.5"


Operation
Two-stage
Low voltage

Additional Features
-Non-programmable digital thermostat.

TYPICAL WIRING DIAGRAMS

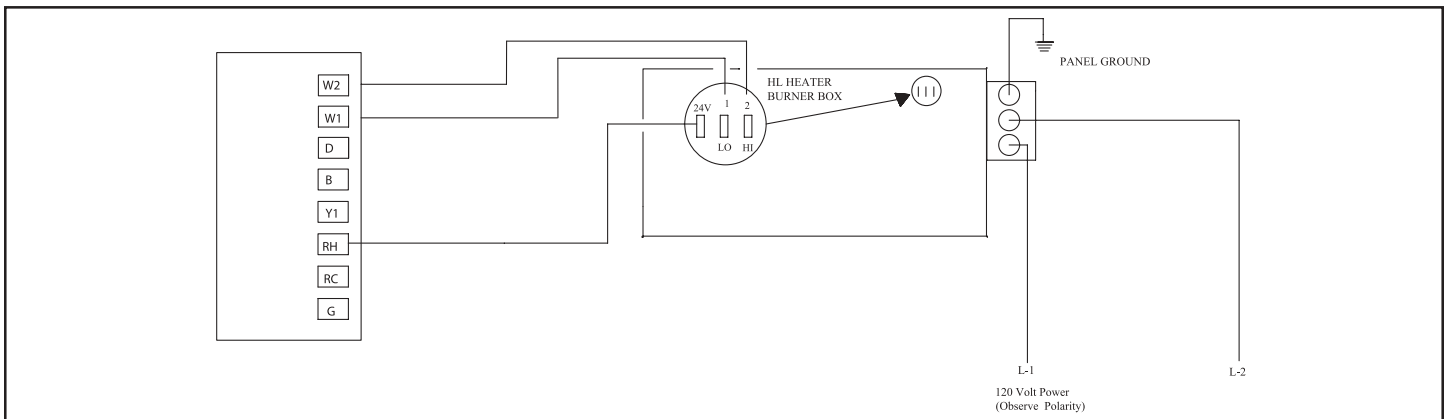

Two-stage heaters with a TH-D152 thermostat. Single heater, single thermostat. No HLRB (relay board) is installed.

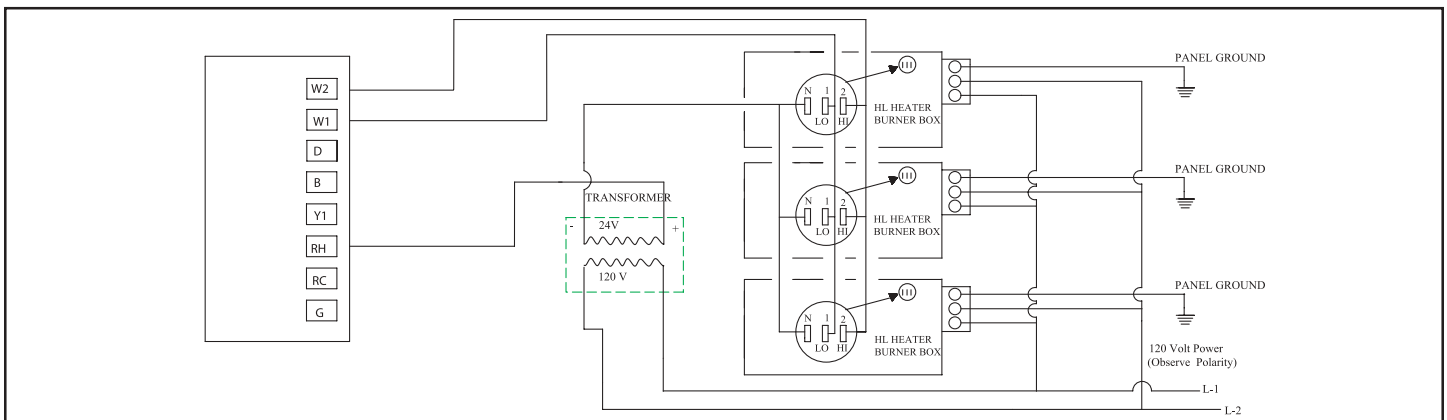

Two-stage heaters with a TH-D152 thermostat. Multiple heaters, single thermostat. HLRB (relay boards) are installed.



Printed in U.S.A.
© 2006 Detroit Radiant Products Co.
21400 Hoover Rd., Warren, MI 48089
T. (586) 756-0950 F. (586) 756-2626
www.detroitradiant.com
Form# LSH044-1/06 (DRP)