

# Thermostat Instruction Sheet

## Lux Pro PSP-722 Thermostat

See thermostat manufacturer's instructions for specific information or requirements.

### Parts List

Lux Pro programmable thermostat with large blue backlight one touch display (P/N: PSP-722).

### PSP-722 Specifications

**Range:** 45°F to 90°F (7°C to 32°C)

**Differential:** Adjustable temperature differential (.25-2.25).

**Operation:** Single or dual stage operation.

**Electrical Rating:** 2 Amps at 24V AC. (20 heaters w/HLRP and 4000-01V). Millivolt, 24V or two AA alkaline batteries (not included).

**Dimensions:** 5.375"(136mm) x 3.375"(86mm) x 1.125"(28mm).

**Additional Features:** 2 or 4 selectable periods per day. °C/°F display, easy programming, adjustable vacation hold and timers.

### Installation Instructions

- 1 Remove cover of thermostat from base.
- 2 Disconnect the power source.
- 3 Locate in an area with good air circulation (no outside walls).
- 4 Install the thermostat approximately 5 feet above floor level.
- 5 Replace the cover.

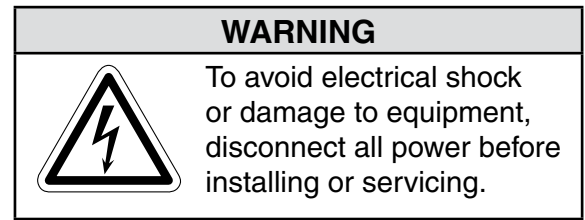


Figure 1 • PSP-722 Thermostat


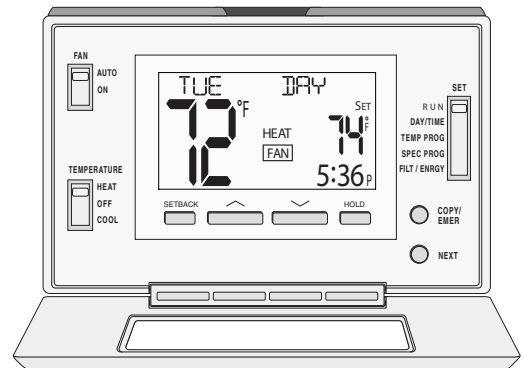


Figure 2 • PSP-722 Thermostat Wiring

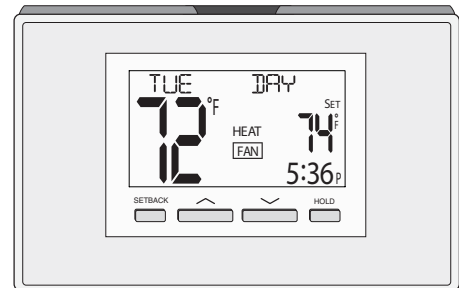