



Internal Wiring Diagrams

DET LADDER DIAGRAM

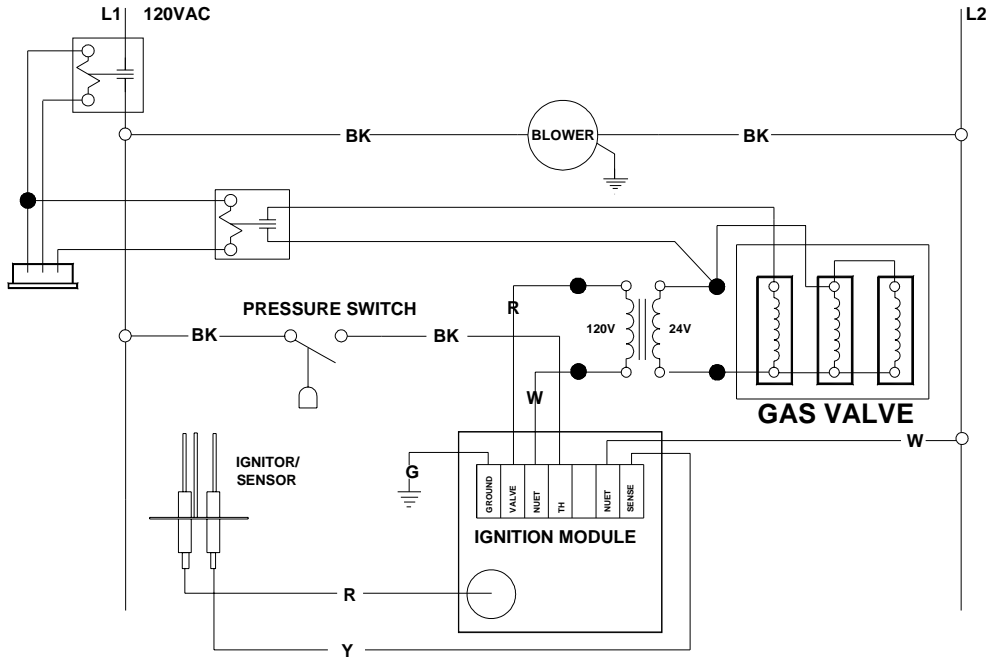

IF ANY OF THE ORIGINAL WIRE AS SUPPLIED WITH THE APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST 105 C.


DET BLOCK DIAGRAM

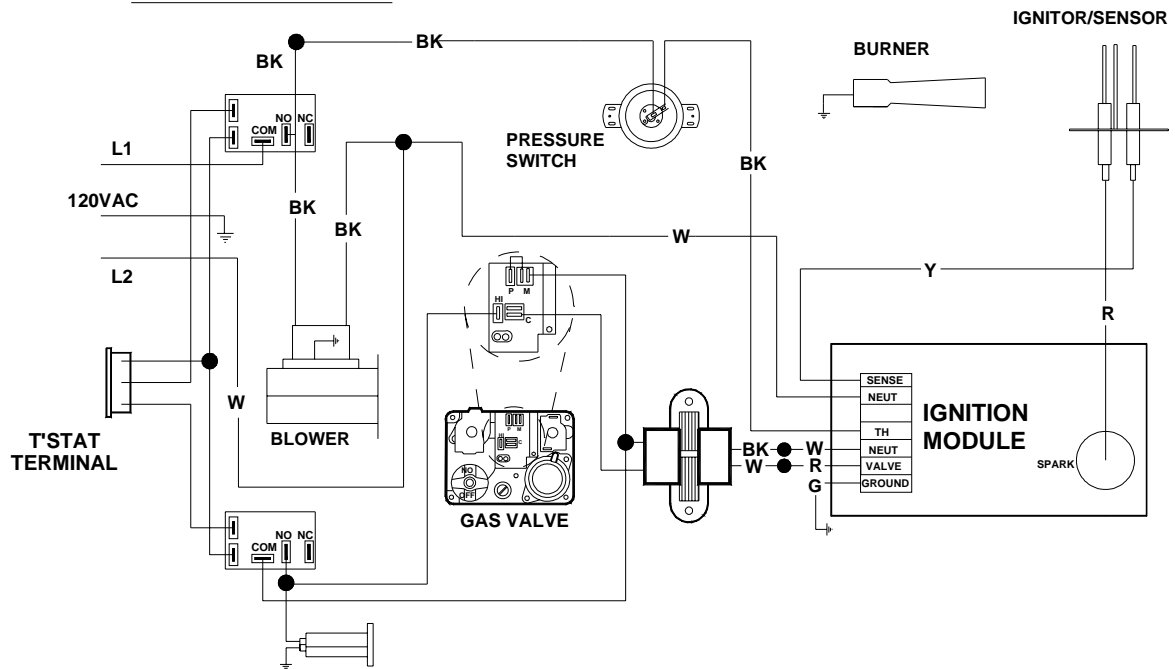

Alternative Wiring Diagrams

Post Purge Option

DET LADDER DIAGRAM - POST PURGE

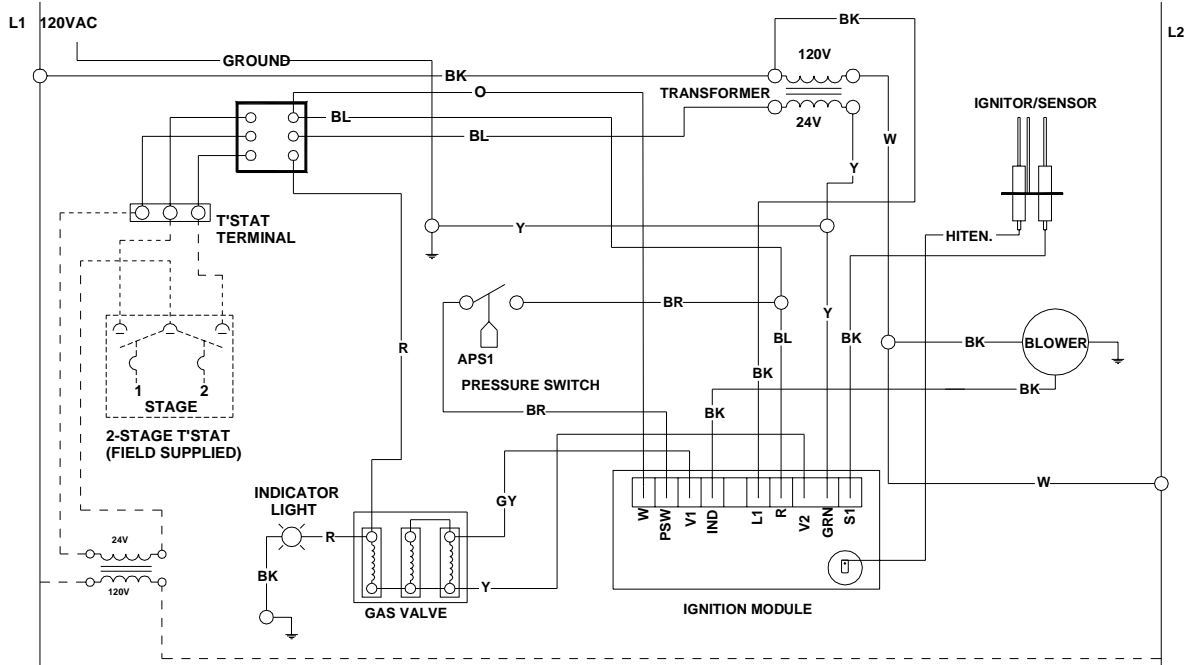

DET BLOCK DIAGRAM - POST PURGE

