


# LYTStandard Series A

High and Low-Bay  
LED Lighting

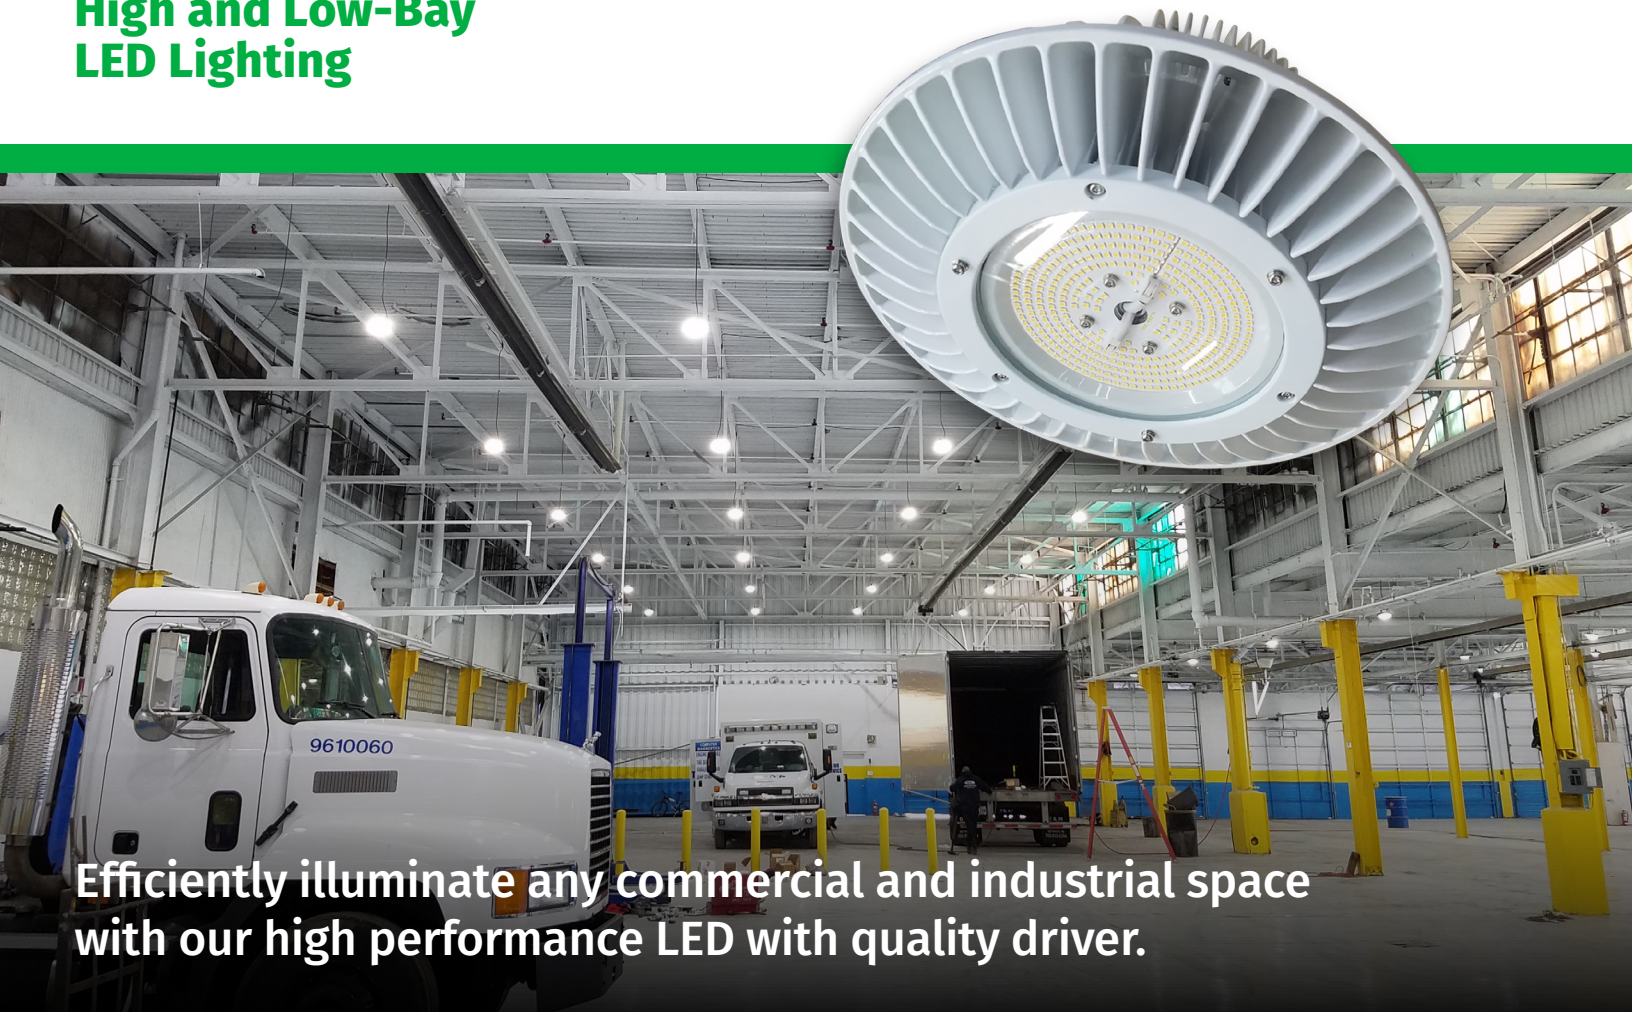

Efficiently illuminate any commercial and industrial space with our high performance LED with quality driver.

Reduce energy costs with our economical LYTStandard Series. This compact fixture allows for various mounting options so you can focus light where it is needed in commercial and industrial applications.

## PRODUCT FEATURES

- Meanwell driver HGB
- Rugged aluminum housing
- IP65 rated for wet environments
- Multiple mounting options
- Shock and vibration resistant

## BENEFITS OF LED BAY LIGHTING

- Instant On - No Warm-Up Period
- Reduced Energy Consumption
- Maintenance Free
- Long Life Expectancy
- Durability
- Superior Light Quality
- High Efficiency

# LYTStandard Series A

## High and Low-Bay LED Lighting



### Product Specifications

**Electrical:**

Input Voltage: 110 to 277 VAC  
Input Frequency: 60 Hertz

**Photometric:**

Lumen Range: 14,000 to 28,000  
Wattage Range: 100 to 200 Watts  
Color Temperature (CCT): 5,000K

**Rated Life:**

50,000 hours

**Mounting:**

Suspended

**Housing:**

White powder-coat standard, IP65 rated for wet locations

**Certifications:**

UL, DLC Premium

**Limited Warranty:**

5 year


### Available LYTStandard High and Low-Bay LED Lighting Models

MODEL #	APPLICATION TYPE	TYP. MOUNTING HEIGHTS	LUMENS	WATTS @ 277VAC	LUMENS /WATT	CRI	BEAM ANGLE	WEIGHT	LENGTH (X)	HEIGHT (Y)
LYTS-A140	Low/High-Bay	10' to 16'	14,000	100	140	80	120°	31 lbs	11.8"	9.76"
LYTS-A210	Low/High-Bay	16' to 24'	21,000	150	140	80	120°	31 lbs	11.8"	9.76"
LYTS-A280	High-Bay	26' to 34'	28,000	200	140	80	120°	31 lbs	11.8"	9.84"


Aluminum cast housing; Circuit board with quality Meanwell HGB Driver

This Re-Verber-LYT LED lighting fixture must be installed correctly. The contractor, owner, installer, purchaser, and user is responsible for installing, maintaining, and operating the light fixture in compliance with all state and local laws, ordinances, regulations, and the American National Standards Institute (ANSI) Safety Code.

### Dimensions

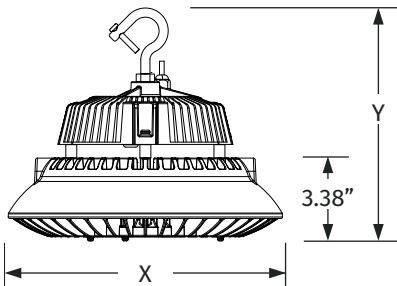

The validity of the product warranty is subject to the correct storage, installation, operation, and maintenance of this product. Failing to comply with proper storage, installation, operation, and maintenance routines will make the warranty invalid. Specifications subject to change without notice.



**DETROIT RADIANT**  
PRODUCTS COMPANY

21400 Hoover Road, Warren, Michigan 48089 USA  
+1.586.756.0950 | sales@drp-co.com

[www.REVERBERLYT.com](http://www.REVERBERLYT.com)



Form No. LBBS\_1X-1119 (XX)

