

DR SERIES CLEARANCES TO COMBUSTIBLES

All listed clearances to combustibles are in inches.

MODEL NO.	SIDES	BACK	TOP	BELOW/ FRONT
DR 30	30	18	28	72
DR 30(S)	30	18	28	72
DR 45	30	18	28	72
DR 50	30	18	34	72
DR 55	32	18	40	72 ¹
DR60	32	18	40	72 ¹
DR 75	48	30	42	98
DR 80	48	30	42	98
DR 85	48	30	42	98
DR 90	48	30	42	98
DR 95	48	30	52	120
DR 100	48	30	52	120
DR 130	48	30	52	120
DR 160	50	32	60	132

¹ Clearance is 80 in. when heater is fitted with a parabolic reflector.



NOTE: If heater is mounted beneath a non-combustible surface, a 24 in. minimum top clearance must be maintained from the top of the heater to prevent overheating the controls.

WARNING



Failure to comply with the stated clearances to combustibles could result in property damage, personal injury, and/or death.

If vehicles are parked below the heater or lifts are present, ensure that all clearances will be maintained from the highest raised vehicle.

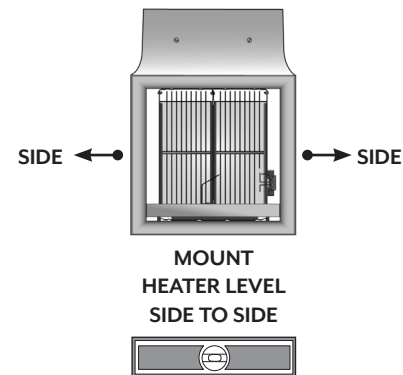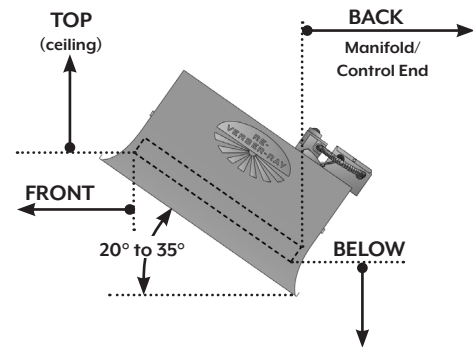

Read and understand the installation, operation, and maintenance manual prior to installing or servicing this unit.

In locations used for the storage of combustible materials, signs must be posted adjacent to the heater's thermostat specifying stacking heights.



**DETROIT RADIANT
PRODUCTS COMPANY**
Detroit Radiant Products | Phone: (586) 756-0950
21400 Hoover Rd. | Email: sales@drp-co.com
Warren, MI 48089 | www.reverberray.com

LSDRC-09/21 (DRPC)