Thermostat Instruction Sheet

TH-T2-4H-NT Two Stage Controller with Timer

TH-T2-4H-NT Specifications

Operation: Two stage heater control

Purpose: Operation of appliances with high/low switching in two

stage and positive off with a 4-hour timer

Electrical Rating: 24 V switching, 10 A max. per switch

Contact Action: Close on manual activation **Dimensions:** 6.25" W x 6.25" H x 4.5" D

Installation Instructions




WARNING

To avoid electrical shock or damage to equipment, disconnect all power before installing or servicing.

Must be mounted to an electrical junction box suitable for the application.

Figure 2 • Two Stage Wiring for Single Heater

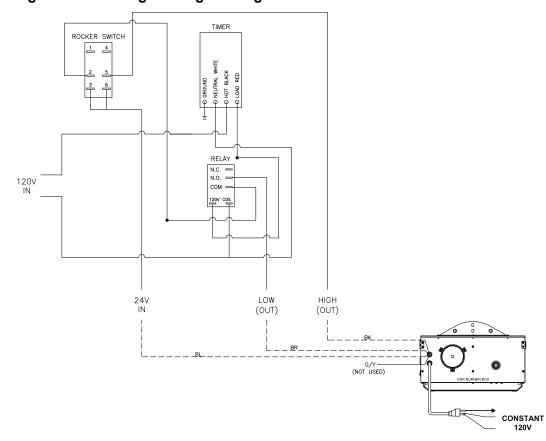

1

Figure 1 • TH-T2-4H-NT Controller

